





SALIENT FEATURES



Chin Guard & Grab Handle



Racks for School Bags



Low foot step for easy Entry & Exit



Large Internal Rear View Mirror and Driver partition



Fire Extinguishers in case of an emergency



Emergency Exit Door for Easy Exit

: FM2.6CR ED, BSVI No. of gears

Type : 4 Cyl.

ENGINE

Common Rail, DI TCIC

Bore x Stroke (mm): 90.9x100

Displacement (cc): 2596

Max. Engine output: 85kW (115hp) @ 2950 rpm

Max. Torque : 350Nm

Max. Torque : 350Nm @ 1400-2200 rpm

GEAR BOX

Make & Model : G32-5

Type : Manual, Gear lock synchromesh on forward gears

No. of gears : 5 Forward + 1 Reverse

TECHNICAL SPECIFICATIONS

STEERING

Type / Description : Power Steering

BODY

Type : Monocoque construction

SUSPENSION

Front & Rear : Spring Semi elliptical

Anti roll bar : Front - Yes, Rear - Optional

Shock absorbers : Hydraulic telescopic

double acting at front & rear

BRAKE

Type : Dual circuit, hydraulic.

vacuum assisted ABS with EBD

Auto Slack Adjuster: Yes

Front : Disc

Rear : Drum /

Disc(4020WB Only)


Parking Brake : Mechanical acting on rear wheel

rear wheel

For T1 & T2 : Mechanical acting on 4020WB only Propeller shaft

FUEL TANK

Capacity (I) : 70 ltrs

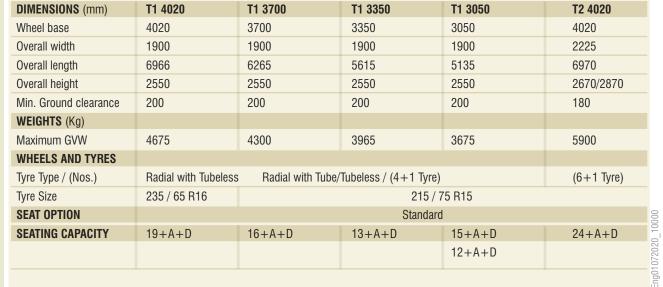









IT OFFERS

- Location Entry, Exit Alerts (via SMS & Email)
- Boarding / Deboarding SMS
- Speeding Alerts
- Live Tracking
- Reports Scheduling on Email
- Historical Route Play
- Emergency Button



FORCE MOTORS LIMITED

CIN L34102PN1958PLC011172 Mumbai - Pune Road, Akurdi, Pune 411 035. INDIA www.forcemotors.com | Toll Free: 1800 2335 000 **NOTE**: On account of continuous Research and Development, specifications are subject to change. The data included herein is to be regarded as approximate. Accessories shown may not necessarily be part of standard equipment.





Authorised Dealer: